


MANUAL STACKER

SYC-A



- It applies C type steel structure design , Lifting more stable and safe.
- All Manual stacker have been equipped with wheel frame protection device.
- The handle have been surround with rubber.With lengthening design, Using more comfortable.
- Single Frame have two ways to unload by manual and pedal, using more flexible.
- Fork with adjustable nut ,it can easy to adjust the fork height .
- Wheel frame equipped with grease fitting design,It will help do routine maintenance for bearing.
- There are too many kinds of Fork types,Fixed Fork,Adjusting fork, also with the adjusting wide leg or Fixed wide leg.

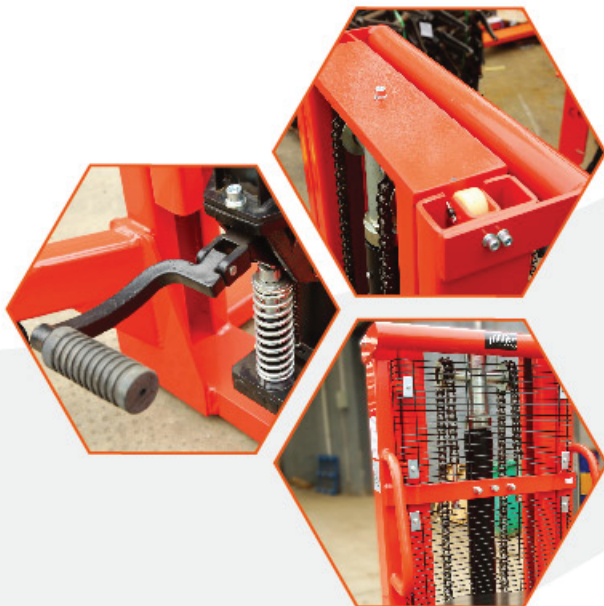

Single Frame Series

Item	Unit	Model			
		SYC0516-A	SYC1016-A	SYC1516-A	SYC2016-A
Power Supply		Manual			
Unload Type		Hand			
Capacity	kg	500	1000	1500	2000
Max. Lifting Height	mm	1600			
Lowered Fork Height	mm	85			
Fork Length	mm	1000	1150		
Fork Width	mm	330-740	330-740/550		
Front Wheel	mm	Φ80*58			
Loaded Wheel	mm	Φ180*50			
Overall Dimension	mm	1600*760*2030			
Leg Weight	mm	690			
Net Weight	kg	150	224	240	270

Double Frame Series

Item	Unit	Model		
		SYC0516-A	SYC1016-A	SYC1516-A
Power Supply		Manual		
Unload Type		Hand		
Capacity	kg	1000/1500/2000	1000/1500	
Max. Lifting Height	mm	2000	2500	3000
Lowered Fork Height	mm	85		
Fork Length	mm	1150		
Fork Width	mm	330-740		
Front Wheel	mm	Φ80*58		
Loaded Wheel	mm	Φ180*50		
Overall Dimension	mm	1600*760*1580	1600*760*1840	1600*760*2080
Leg Weight	mm	690		
Net Weight	kg	290	310	330

PT. BADAQ PRIMA LESTARI

Kawasan Industri Millenium, Jl. Millenium 15 Blok I-2 No. 3A, Desa Peusar, Kecamatan Panongan,
Kabupaten Tangerang, Banten 15710 INDONESIA
Tel: +62 59986616 / 30 , Fax.: +62 59986847
www.badakprima.co.id